

DURATEMP PLYWOOD SIDING

FINISHING

Siding must be field primed before finish painting. Use quality exterior alkylid, oil or latex system top coats. Do not use vinyl acrylic exterior paint.



STANDARDS

Stinson Duratemp plywood siding exceeds the requirements of APA 303 Siding Specifications and US Product Standard PS I.

APPROVALS

- Duratemp has these approvals
- I.C.B.O., Report No. 4856
 - HUD-UM-40C
 - NER-QA387, PRP-108

APPLICATION INSTRUCTIONS

Refer to stamp on back of Duratemp panel for minimum stud spacing. Space nails 6" oc at panel edges and 12" oc at intermediate supports.

Use corrosion resistant siding, casing nails or box 6d for 3/8" or 1/2" panels, 8d for 5/8" panels.

Apply Duratemp according to the APA application recommendations for performance rated sidings.



STIMSON DURATEMP

DESCRIPTION

Duratemp is a plywood siding with a 1/8 inch tempered hardboard face. It looks natural, resists dents, checks and cracks and is 100% clear - no wood patches or synthetic fills.

STIMSON DURATEMP SIDING


Stimson Duratemp matches the textured appearance, warmth and beauty of rough sawn wood. Duratemp is dent resistant, with a finish that won't crack or peel when properly primed and painted.

Duratemp is genuine plywood siding with a hardboard face. It is inherently stronger, lighter and more durable than engineered wood sidings.

Superior painting properties help keep construction and maintenance costs down. Normal care will provide years beauty plus durability.

Sizes: 4'x7', 4'x8', 4'x9' or 4'x10'.

Thicknesses: 3/8", 1/2" and 19/32".
Shiplapped or square edges

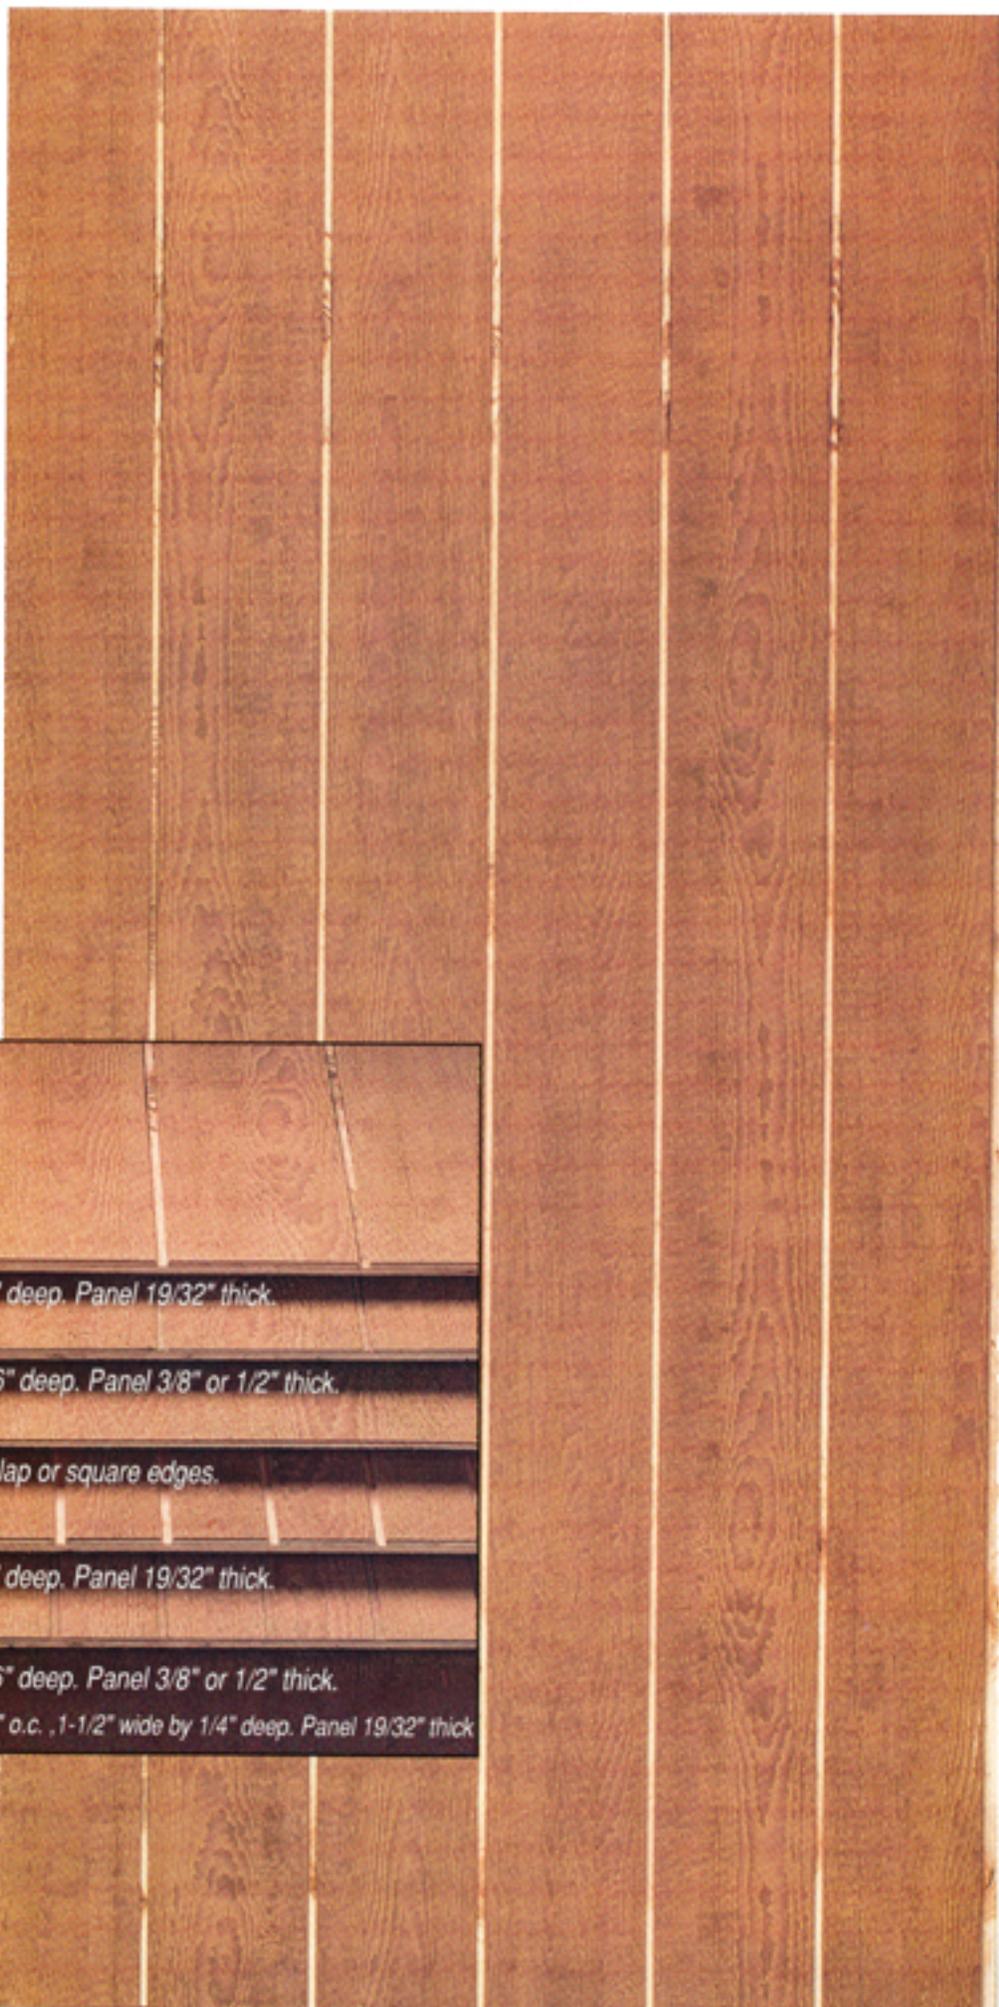

Grooves 8" o.c. Grooves are 3/8" wide by 1/4" deep. Panel 19/32" thick.

Grooves 8" o.c. Grooves are 3/8" wide by 1/16" deep. Panel 3/8" or 1/2" thick.

Plain Duratemp 3/8", 1/2" or 19/32" thick. Shiplap or square edges.

Grooves 4" o.c. Grooves are 3/8" wide by 1/4" deep. Panel 19/32" thick.

Grooves 4" o.c. Grooves are 3/8" wide by 1/16" deep. Panel 3/8" or 1/2" thick.

Also Available Inverted Batten 12" Grooves 12" o.c. ,1-1/2" wide by 1/4" deep. Panel 19/32" thick



STIMSON LUMBER